



BLK 1.6 LE

Nibbler up to 1.6 mm

Compact nibbler for deep-channel trapezoidal sheet metals in roof and façade construction.

Product number: 7 232 39 60 00 0

Details

- The specialist when it comes to zero compromise work on trapezoidal sheet metals with deep channels of up to 160 mm.
- Optimum ergonomics with a handle up to 20% slimmer because of its extremely thin drive head.
- Cutting direction setting can be changed in 45° steps up to 360° using tool-free pivoting cutting head.

- + QuickIN clamping system.
- + High cutting speed.
- Motor with outstanding performance and stability.
- + Chip protection mesh on vent slots.
- + 5 metre cable.
- + Stainless steel up to 0.7 mm.

Price includes

- + 1 die for trapezoid sheet metal (31309122005) fitted
- + 1 wearing plate fitted

Product feature

- + Cutting direction
- + Adjustable stroke

Application

Curve cuts


Interior cut-outs

Profile sections

Notches





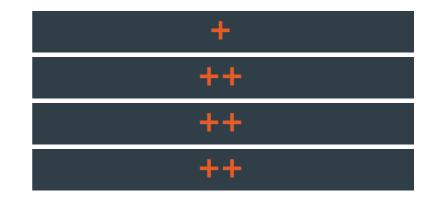



+ suitable**+ +** well suitable

Technical data

TECHNICAL DATA

VIBRATION AND SOUND EMISSION VALUES

| Input | 350 W | Sound pressure level LpA Uncertainty of measured value KpA | 82 dB 3 dB |
|--|-----------------|---|----------------------|
| Output | 210 W | | |
| Strokes | 800 - 1,500 rpm | Sound power level LWA Uncertainty of measured value KWA | 93 dB 3 dB |
| Cutting speed | 2.7 m/min | Sound peak value LpCpeak Uncertainty of measured value KpCpeak | 93 dB |
| Steel up to 400 N/mm ² | 1.6 mm | | 3 dB |
| Steel up to 600 N/mm ² | 1 mm | | |
| Steel up to 800 N/mm ² | 0.7 mm | Vibration value 1 αhv 3- way Uncertainty of measured value | 8,8 m/s² 1,5 m/s² |
| Non-ferrous metals up to 250 N/mm² | 2.5 mm | Κα | |
| Cutting width | 5 mm | | |
| Immersion Ø with die | 24 mm | | |
| Rad. of smallest curve (inside/outside) | 65 / 70 mm | | |

Application examples

5 m

1.90 kg

Cable with plug

EPTA

Weight according to



