GWP 10

Thread drill up to M 10

Fast, accurate thread drill with reversing gear for shorter working times.

Product number: 7 209 38 60 00 0

Details

- Unique speed thanks to reversing gear for automatic reversal of rotation direction when retracting drill spindle from threaded hole. Rapid return action at 680 rpm for shorter cycle times.
- Outstanding precision due to clearance-free connection of drill shaft and threaded chuck with B12 taper mounting for high concentricity. Positive fit of thread drill in chuck for the best results.
- FEIN sensitive handle for applying feed force in the direct drilling axis while ensuring an ideal position in the guiding hand.
- FEIN high-power motor with stable speed.
- Small width across corners of 23 mm.
- Metal gear head.
- Distortion-free barrel-type motor housing.

Price includes

- 1 additional handle
- Threaded chuck not included

Technical data

TECHNICAL DATA

Input	450 W
Output	250 W
Idling speed in reverse running	0 - 1,000 rpm
Load speed when cutting	0 - 450 rpm
Load speed in reverse running	0 - 680 rpm

VIBRATION AND SOUND EMISSION VALUES

Sound pressure level LpA Uncertainty of measured value KpA	82 dB 3 dB
Sound power level LWA Uncertainty of measured value KWA	93 dB 3 dB
Sound peak value LpCpeak Uncertainty of measured value KpCpeak	96 dB 3 dB

Torque at max. output power	21 Nm
Stall torque	53 Nm
Thread in steel up to	M 10
Thread in stainless steel	M 10
Cone at drill shaft	B 12
Collar Ø	43 mm
Width across corners	23 mm
Cable with plug	5 m
Weight according to EPTA	1.60 kg
Weight according to EPTA	1.60 kg

Vibration value 1 αhv 3-way Uncertainty of measured value Kα	3,0 m/s² 1,5 m/s²
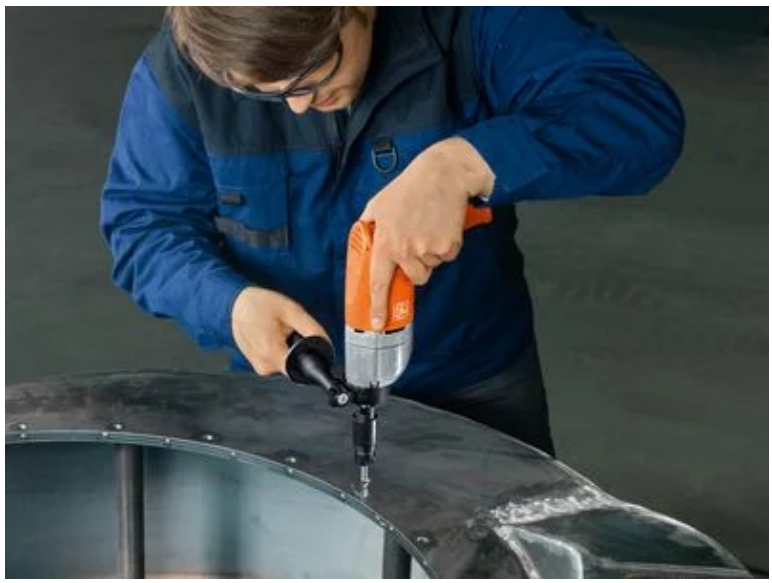
Application examples