


Sanding sheets

Order number:: 6 37 28 014 01 0

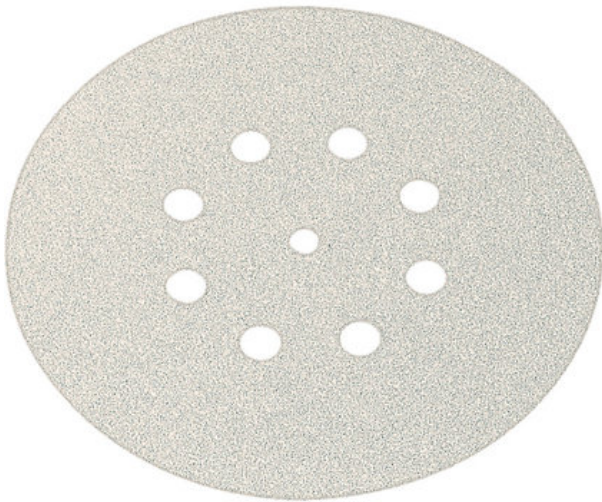

Perforated, Ø 6 in, with H&L.

Application: wood, paints, filler, automotive paints, fiberglass, plastics. Quality: fully synthetic-resin bonded, corundum. Features: greatly reduces loading, flexible.

Grit 220

Qty 50

Fits:

MSf 636-1 (MSf 636-1)

Benefits:

perforated version for excellent dust extraction