


# Sanding sheets

Order number:: 6 37 28 061 01 0

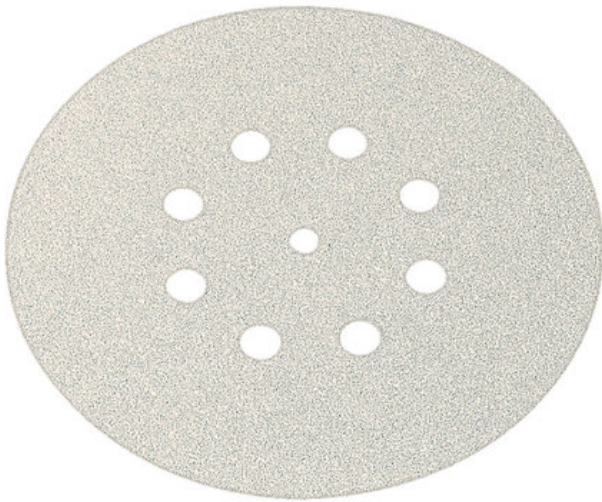

perforated, Ø 150 mm, with Velcro rapid attachment  
Application: wood, paint, automotive paints, filler,  
fibreglass, plastics. Quality: fully synthetic-resin  
bonded, corundum. Feature: greatly reduces glazing,  
flexible.

Grain 400

No. in pack 50 pcs

Suitable for:

MSf 636-1 (MSf 636-1)