


# Sanding sheets

Order number:: 6 37 28 072 01 2

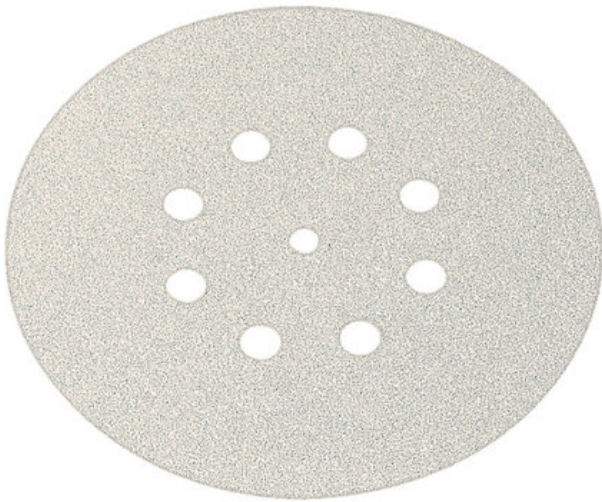

perforated, Ø 150 mm, with Velcro rapid attachment

Application: Wood, metal, car bodies, welds.

Quality: fully synthetic-resin bonded, light bond,  
corundum. Features: high sanding capacity.

Grain 40

No. in pack 50 pcs

Suitable for:

MSf 636-1 (MSf 636-1)