


Sanding sheets

Order number:: 6 37 28 084 01 3

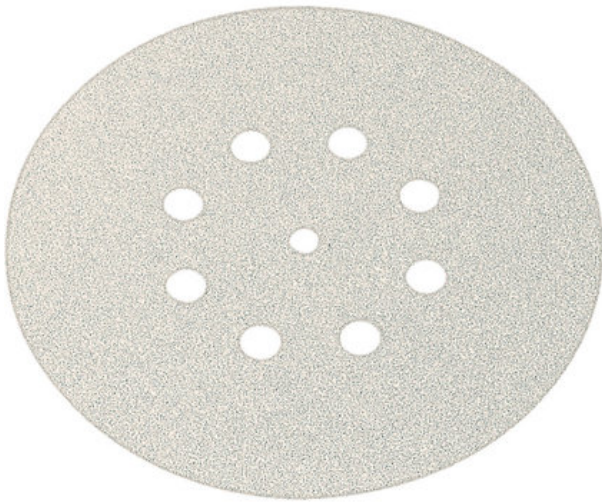

perforated, Ø 150 mm, with Velcro rapid attachment
Application: wood, paint, automotive paints, filler,
fibreglass, plastics. Quality: fully synthetic-resin
bonded, corundum. Feature: greatly reduces glazing,
flexible.

Grain 120

No. in pack 50 pcs

Suitable for:

MSf 636-1 (MSf 636-1), WPO 14-15 E marine polishing set (WPO 14-15 E), WPO 14-15 E marine polishing set (WPO 14-15 E)